



KG SOLAR LIGHT

Solar light LED


High Lumen, High Power, High Capacity
Light Your Way Home

www.elecmar.ma

Projecteur



Modèle	25	60	100	200
Puissance LED	25W	60W	100W	200W
Couleur Temperature	6500K	6500K	6500K	6500K
Flux lumineux	2850Lm	5700Lm	9500Lm	19000Lm
Temps de charges	8 heures	8 heures	8 heures	8 heures
Temps de travail	5-20h	5-20h	5-20h	5-20h

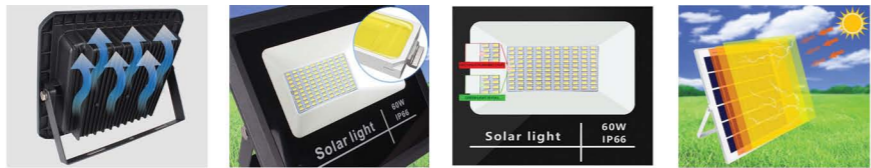


Éclairage public



50W
 Product type : Solar multi-propose flood light
 Solar panel : 355 * 250 * 20 mm
 Material : high quality aluminum + tempered glass
 Product weight : 3500g
 Solar panel specifications : 10W / 5V
 Battery type : 3.2V 10000 mAH
 Protection class : IP65
 Lighting duration : more than 12 hours
 Installation caliber : 50mm
 Total luminous flux : 1000 + -15% LM



100W
 Product type : Solar multi-propose flood light
 Solar panel : 430 * 350 * 23 mm
 Material : high quality aluminum + tempered glass
 Product weight : 3500g
 Solar panel specifications : 20W / 5V
 Battery type : 3.2V 10000 mAH
 Protection class : IP65
 Lighting duration : more than 12 hours
 Installation caliber : 50mm
 Total luminous flux : 1000 + -15% LM



50W
 Product type : Solar multi-propose flood light
 Solar panel : 350 * 350 * 23 mm
 Material : high quality aluminum + tempered glass
 Product weight : 3500g
 Solar panel specifications : 10W / 5V
 Battery type : 3.2V 10000 mAH
 Protection class : IP65
 Lighting duration : more than 12 hours
 Installation caliber : 50mm
 Total luminous flux : 1000 + -15% LM

Borne et applique



REF : BD 1104
6V-4,5W IP 44



REF : CPD2204
6V-4,5W IP44



REF : BD3304
5V - 2W IP44



REF : CPD3004
5V - 5W IP44



REF : CPD3004
5V-2W IP44



REF : BD6001
5V-5W IP44



REF : CPD5004
5V-5W IP44



REF : CPD4804
6V-3W IP44



REF : CPD5405
6V-3W IP44



20W
 Product type : Solar multi-propose flood light
 Solar panel : 295 * 188 * 20 mm
 Material : high quality aluminum + tempered glass
 Product weight : 1200g
 Solar panel specifications : 4W / 5V
 Battery type : 3.2V 10000 mAH
 Protection class : IP65
 Lighting duration : more than 12 hours
 Installation caliber : 50mm
 Total luminous flux : 1000 + -15% LM



30W
 Product type : Solar multi-propose flood light
 Solar panel : 345 * 235 * 20 mm
 Material : high quality aluminum + tempered glass
 Product weight : 2300g
 Solar panel specifications : 6W / 5V
 Battery type : 3.2V 10000 mAH
 Protection class : IP65
 Lighting duration : more than 12 hours
 Installation caliber : 50mm
 Total luminous flux : 1000 + -15% LM



High Light



Remote Control



Waterproof





elecmar

22, Rue Ben Jilali Taj-Eddine Maârif, 20370 Casablanca

Tél. : +212 522 237 302 (L.G) - Fax. : +212 5 22 990 929

Km 7 Route Médiouna 29490 Casablanca

Tél. : +212 522 970 200 - Fax. : +212 522 970 668

E-mail : elecmar@elecmar.ma - Site Web : www.elecmar.ma